




Durafill 19 Geofoam Insulation



Plymouth Foam's Durafill™ Expanded Polystyrene (EPS) geofoam is a lightweight cellular plastic foam used in block or board form for a wide range of geotechnical applications. Durafill is often used in place of natural fill on building or road construction projects where soft soil exists. Its weight-to-strength load bearing characteristics are uniquely effective in reducing the weight burden on underlying soil without sacrificing compressive strength.

- **Great weight to strength load bearing characteristics**
- **No physical breakdown during prolonged burial**
- **Low water absorption**
- **Will not contaminate the surrounding environment**
- **Design Flexibility with densities, size and shapes**
- **Great Thermal Insulation Properties**

Lighten the Load

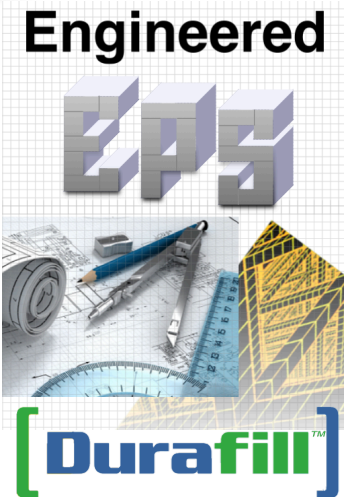

Plymouth Foam
1800 Sunset Dr.
Plymouth, WI 53073
920-889-0021
800-669-1176
plymouthfoam.com

Durafill™ 19 Geofoam Physical Properties			
Property		Durafill 19	
ASTM D6817			
Density, minimum	lb/ft ³	1.15	
	kg/m ³	18.4	
Compressive Resistance @ 10% deformation, min.	psi	16.0	
	psf	2300	
	kPa	110	
Compressive Resistance @ 5% deformation, min.	psi	13.1	
	psf	1890	
	kPa	90	
Compressive Resistance @ 1% deformation, min.	psi	5.8	
	psf	840	
	kPa	40	
Flexural Strength, min.	psi	30.0	
	kPa	207	
Elastic Modulus, min.	psi	580	
	kPa	4000	
Oxygen Index, min.	volume %	24.0	
Water Absorption by total immersion	volume %	3.0	
Buoyancy Force	lb/ft ³	61.3	
	kg/m ³	980	
ASTM C578			
Thermal Resistance (R-Value), min. per 1.0" thickness	25 deg. F	F.ft ² .h/Btu	4.4
		K.m ² /W	0.77
	40 deg. F	F.ft ² .h/Btu	4.2
		K.m ² /W	0.74
	75 deg. F	F.ft ² .h/Btu	3.8
		K.m ² /W	0.67
Water Vapor Perm. of 1" thickness, max. perm.			3.5

See ASTM D6817 and ASTM C578 for test methods and complete information. The information in this bulletin is presented in good faith, and is believed to be accurate. All statements are made without warranty expressed or implied. Each project using Durafill Geofoam should be designed by an engineer.

Contact

John Calkins 920-889-0021 jcedisonassc@yahoo.com