



# Durafill 29


## Geofoam Insulation



Plymouth Foam's Durafill™ Expanded Polystyrene (EPS) geofoam is a lightweight cellular plastic foam used in block or board form for a wide range of geotechnical applications. Durafill is often used in place of natural fill on building or road construction projects where soft soil exists. Its weight-to-strength load bearing characteristics are uniquely effective in reducing the weight burden on underlying soil without sacrificing compressive strength.

- Great weight to strength load bearing characteristics
- No physical breakdown during prolonged burial
- Low water absorption
- Will not contaminate the surrounding environment
- Design Flexibility with densities, size and shapes
- Great Thermal Insulation Properties

Lighten the Load

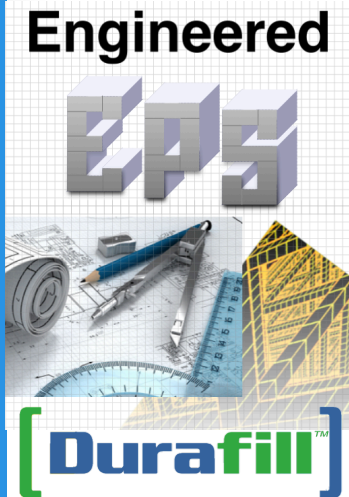

**Plymouth Foam**  
**1800 Sunset Dr.**  
**Plymouth, WI 53073**  
**920-889-0021**  
**800-669-1176**  
**[goplymouthfoam.com](http://goplymouthfoam.com)**

Durafill™ 29 Geofoam Physical Properties			
Property		Durafill 29	
<b>ASTM D6817</b>			
Density, minimum	lb/ft <sup>3</sup>	1.80	
	kg/m <sup>3</sup>	28.8	
Compressive Resistance @ 10% deformation, min.	psi	29.0	
	psf	4180	
	kPa	200	
Compressive Resistance @ 5% deformation, min.	psi	24.7	
	psf	3560	
	kPa	170	
Compressive Resistance @ 1% deformation, min.	psi	10.9	
	psf	1570	
	kPa	75	
Flexural Strength, min.	psi	50.0	
	kPa	345	
Elastic Modulus, min.	psi	1090	
	kPa	7500	
Oxygen Index, min.	volume %	24.0	
Water Absorption by total immersion	volume %	2.0	
Buoyancy Force	lb/ft <sup>3</sup>	60.6	
	kg/m <sup>3</sup>	970	
<b>ASTM C578</b>			
Thermal Resistance (R-Value), min. per 1.0" thickness	25 deg. F	F.ft <sup>2</sup> .h/Btu	4.8
		K.m <sup>2</sup> /W	0.84
	40 deg. F	F.ft <sup>2</sup> .h/Btu	4.6
		K.m <sup>2</sup> /W	0.81
	75 deg. F	F.ft <sup>2</sup> .h/Btu	4.2
		K.m <sup>2</sup> /W	0.74
Water Vapor Perm. of 1" thickness, max. perm.		2.5	

See ASTM D6817 and ASTM C578 for test methods and complete information. The information in this bulletin is presented in good faith, and is believed to be accurate. All statements are made without warranty expressed or implied. Each project using Durafill Geofoam should be designed by an engineer.

### Contact

**John Calkins 920-889-0021 [jcedisonassc@yahoo.com](mailto:jcedisonassc@yahoo.com)**